

WL-TR-94-3129

AN ANALYSIS OF B-1B EXTERIOR
JET BLAST WINDSHIELD ANTI-ICING PERFORMANCE
USING PRE-COOLED COMPRESSOR BLEED AIR




D.S. EMMER
M.P. BOUCHARD

UNIVERSITY OF DAYTON RESEARCH INSTITUTE
300 COLLEGE PARK
DAYTON OH 45469-0110

JULY 1994

INTERIM REPORT FOR 03/01/94-05/01/94

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

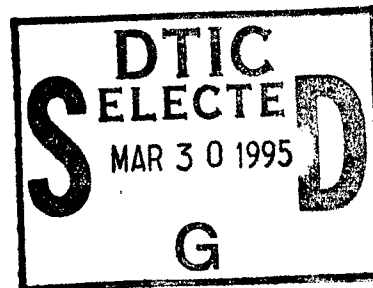

FLIGHT DYNAMICS DIRECTORATE
WRIGHT LABORATORY
AIR FORCE MATERIEL COMMAND
WRIGHT PATTERSON AFB OH 45433-7562

19950327 067

DTIC QUALITY INSPECTED 1

NOTICE


When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely Government-related procurement, the United States Government incurs no responsibility or any obligation whatsoever. The fact that the government may have formulated or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication, or otherwise in any manner construed, as licensing the holder, or any other person or corporation; or as conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

This report is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nations.

This technical report has been reviewed and is approved for publication.



ERIK W. JOY, 1Lt, USAF
B-1B Project Engineer
Windshield Program Office



COLLEEN A. JASPER, Capt, USAF
Chief, Windshield Program Office



RICHARD E. COLCLOUGH, JR.
Chief
Vehicle Subsystems Division

If your address has changed, if you wish to be removed from our mailing list, or if the addressee is no longer employed by your organization please notify WL/FIVR, WPAFB, OH 45433-7502 to help us maintain a current mailing list.

Copies of this report should not be returned unless return is required by security considerations, contractual obligations, or notice on a specific document.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE July 1994	3. REPORT TYPE AND DATES COVERED Interim - March 1994 to May 1994	
4. TITLE AND SUBTITLE AN ANALYSIS OF B-1B EXTERIOR JET BLAST WINDSHIELD ANTI-ICING PERFORMANCE USING PRE-COOLED COMPRESSOR BLEED AIR			5. FUNDING NUMBERS F33615-92-C-3400 PE 64212 PR 1926 TA 01 WU 10	
6. AUTHOR(S) D. S. Emmer M. P. Bouchard			8. PERFORMING ORGANIZATION REPORT NUMBER UDR-TR-94-94	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) University of Dayton Research Institute Aerospace Mechanics Division 300 College Park Dayton, Ohio 45469-0110			10. SPONSORING/MONITORING AGENCY REPORT NUMBER WL-TR-94-3129	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) FLIGHT DYNAMICS DIRECTORATE WRIGHT LABORATORY AIR FORCE MATERIAL COMMAND WRIGHT PATTERSON AFB OH 45433-7562				
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) This work presents the results of an analytical study designed to evaluate whether the B-1B hot-air windshield de-icing/anti-icing system, operating independently from the embedded electrical resistance system, was capable of adequately meeting de-icing and anti-icing requirements. Two icing scenarios were considered in loiter, landing and ground/taxi modes of operation. The results indicate that in a loiter and landing mode, the system capability ranges from marginal to adequate. Additional work is needed to expand the applicability of the analysis mode to ground/taxi conditions.				
14. SUBJECT TERMS B-1B, windshield, anti-icing, de-icing, jet blast, forced air, blown air			15. NUMBER OF PAGES 29	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT UL	

TABLE OF CONTENTS

Section	Page
1 Introduction	1
2 Physical Description	
2.1 Windshield Characteristics	2
2.2 Nozzle Characteristics	6
3 Icing Criteria and Limitations	9
4 Analysis	14
5 Results and Discussion	17
6 Summary and Recommendations	21
References	22

Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification _____	
By _____	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

LIST OF FIGURES

Figure	Title	Page
1	B-1B Environmental Protection System (EPS) (Ref. 2)	3
2	Windshield Panel Detail, Flat Area Pattern (Ref. 2)	4
3	B-1B Windshield Cross Section (Ref. 2)	5
4	Windshield Nozzles; Top View	6
5	Anti-Ice Nozzle Geometry Detail	7
6	Most Probable Icing Temperature vs. Altitude (Ref. 5)	10
7	Maximum Continuous Icing Envelope (Ref. 2)	11
8	Mach Number Required to Prevent Icing (Ref. 2)	11
9	Liquid Water Content vs. Droplet Diameter (Ref. 2)	12
10	Variation of K_1 and K_2 with Droplet Diameter (Ref. 9)	15
11	Variation of K_1 and K_2 with Liquid Water Content (Ref. 9)	15
12	Windshield Temperature Outer Surface Temperature, Distribution: Loiter	19
13	Windshield Temperature Outer Surface Temperature, Distribution: Landing	20

LIST OF TABLES

Table	Title	Page
1	External Nozzle Performance Characteristics	8
2	Icing Parameters: Loiter	12
3	Icing Parameters: Landing	13
4	Icing Parameters: Ground/Taxi	13

NOMENCLATURE

D	Median Droplet Diameter, microns
K_1, K_2	Constants
LWC	Liquid Water Content, gm/cu. meter
P	Pressure, lb/sq. ft.
T	Temperature, deg. R
T_w	Windshield Surface Temperature, deg. R
V	Velocity, ft/sec
W_b	Bleed Air Mass Flow Rate, lb/sec
X	Distance Along Windshield, ft.

Subscripts

a	Ambient
b	Bleed Air
D	Droplet
L	Liquid Water Content
0	Dry Air

FOREWORD

This study was performed by the Aerospace Mechanics Division of the University of Dayton Research Institute (UDRI), Dayton, Ohio. The work was sponsored by the United States Air Force under contract number F33615-92-C-3400. The Air Force contract monitor was Lt. Erik Joy, WL/FIVR, Wright-Patterson AFB, Dayton, Ohio.

The work was conducted during the period from March, 1994, to May, 1994. UDRI supervision was provided by Mr. Blaine S. West, Head, Aerospace Mechanics Division, Mr. Gregory J. Stenger, Structures Group Leader, Mr. Michael P. Bouchard, Project Leader and Dr. Deems S. Emmer, Principal Investigator.

SECTION 1

INTRODUCTION

A significant body of research has been documented relative to the design and performance of aircraft windshield de-icing and anti-icing systems (Ref. 1). Over the years various icing control methods have been employed that include internal and external hot-air blast, electrical resistance heating utilizing embedded electrical wires or electrical conducting films, infrared radiation, aerodynamic heating and others. While de-icing equipment is designed to remove ice accretion that has formed or is forming, anti-icing equipment is designed to prevent the initial formation of ice on the aircraft surfaces. The effectiveness, level of performance and method of selection of any one of the above de-icing or anti-icing methods, as applied to any particular aircraft, varies widely and has been demonstrated to be especially sensitive to aircraft performance, flight profile, and atmospheric icing conditions as well as the anti-icing hardware itself. Due to issues of safety as well as wide variations in application and performance requirements, most commercial and military aircraft do not rely on a single windshield anti-icing system but employ multiple systems. The most common systems combine or supplement embedded wires or transparent, electrically conductive film, with the external hot-air blast similar to the configuration found on the current production model of the B-1B.

The objective of the present study was to evaluate the performance level of the B-1B external, hot-air jet blast, windshield anti-icing system described as part of the "Environmental Protection System" or "EPS" (Ref. 2). The analysis sought to determine if the hot-air jet blast system, operating independently from the embedded electrical film system, was sufficient to meet aircraft windshield anti-icing requirements in at least two typical icing scenarios for aircraft in loiter, landing, and ground/taxi modes of operation. The analysis was restricted to an assessment of windshield heating only and did not include the anti-icing requirements of the airframe, flight surfaces, engine nacelles, radomes, probes or other major aircraft systems.

SECTION 2

PHYSICAL DESCRIPTION

2.1 Windshield Characteristics

The B-1B windshield anti-icing system, shown schematically in Figure 1, is classified as part of the overall Environmental Control System (ECS) (Ref. 3). Note that the system includes rain removal and windshield washing capabilities as well as hot-air jet blast and electrical anti-icing/de-icing components.

A typical B-1B windshield panel layout and cross section are shown in Figures 2 and 3. Two windshield configurations were considered. The current production configuration, with a total overall thickness of 1.50 inches, consists of a 5-layer laminate. The outer layer of laminate is made up of a 0.120-inch-thick layer of strengthened glass, while those that remain are alternating layers of silicone and polycarbonate. The second configuration, a proposed all-plastic panel, is similar except that the outer layer of glass is replaced with a layer of polycarbonate.

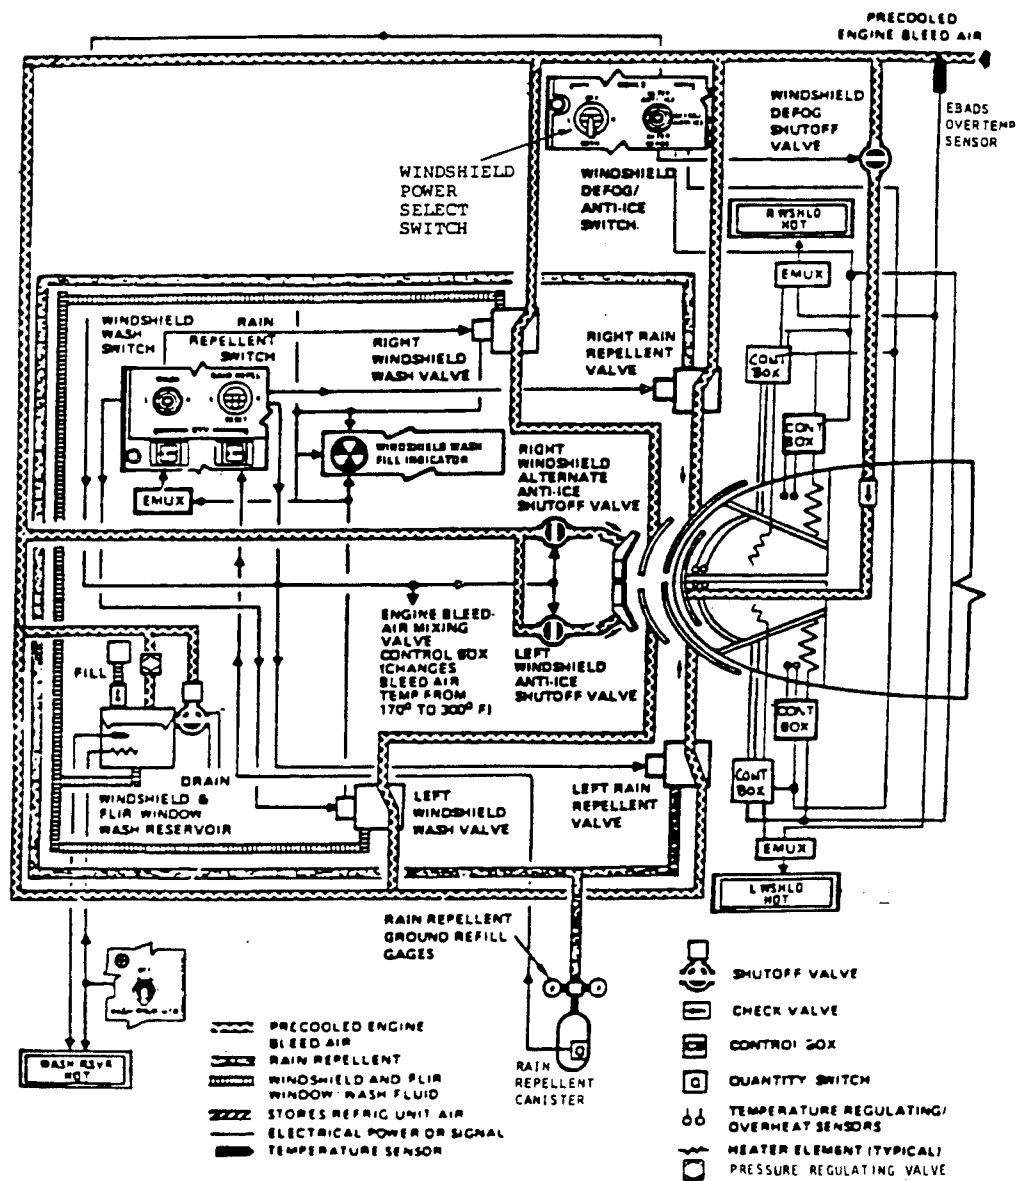


Figure 1. B-1B Environmental Protection System (EPS) (Ref. 2)

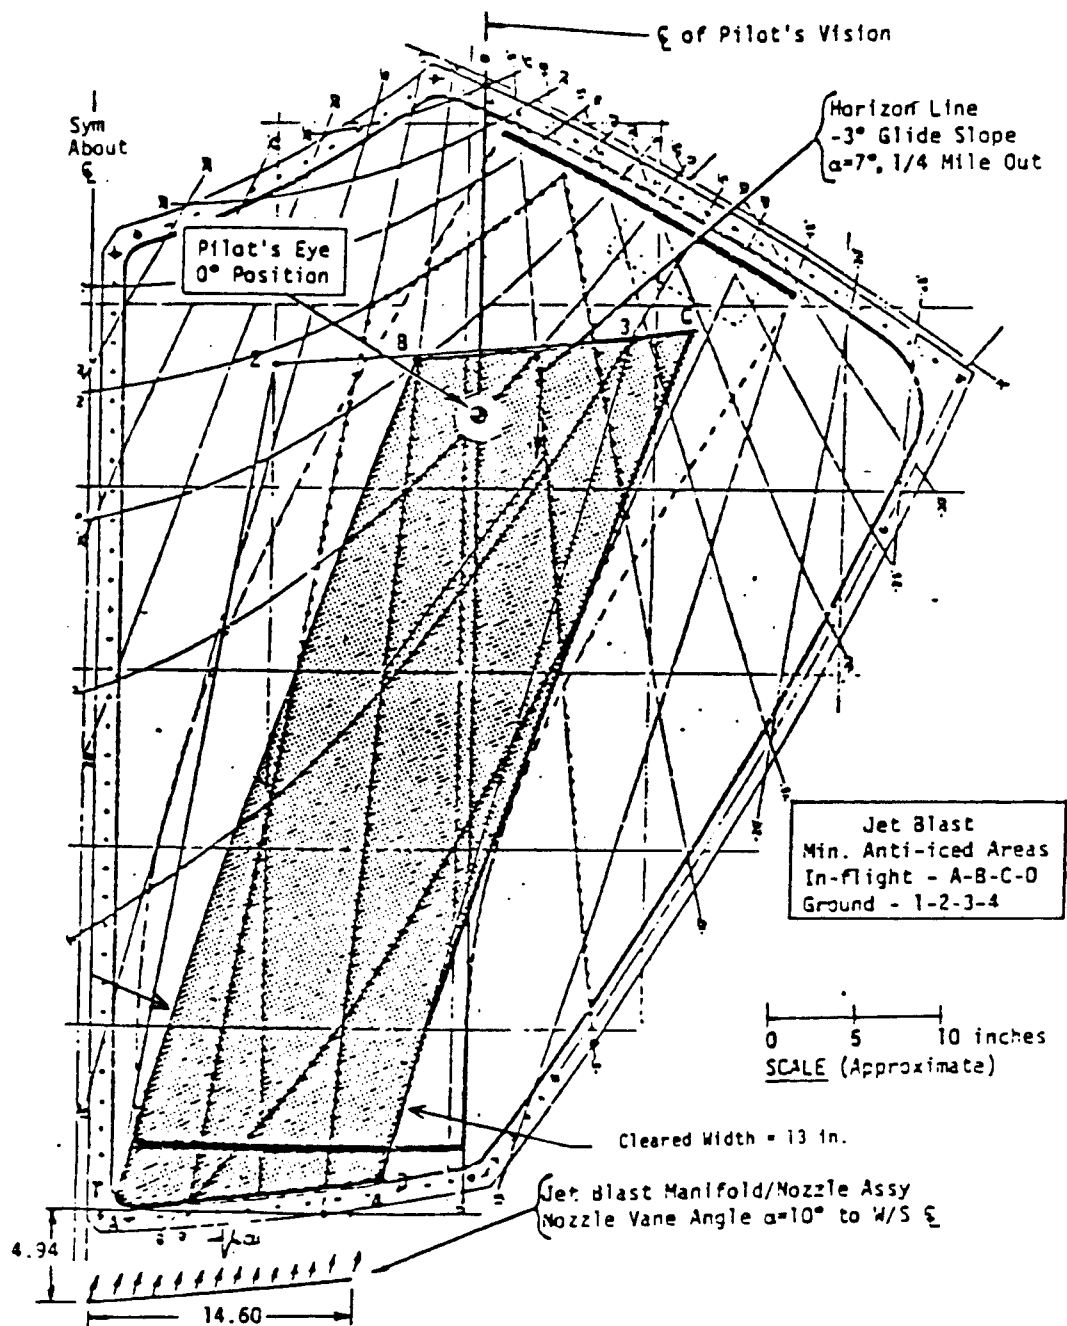


Figure 2. Windshield Panel Detail; Flat Area Pattern (Ref. 2).

The surface area subject to hot-air anti-icing is considerably smaller than the total area of the windshield surface. The total area of one side of the forward-facing windshield panel is approximately 15.35 sq. ft., while the projected frontal area is approximately 5.2 sq. ft. The area subject to hot-air anti-icing, shown shaded in Figure 2, is approximately 4.5 sq. ft. and is an area measuring approximately 13 inches wide x 50 inches long.

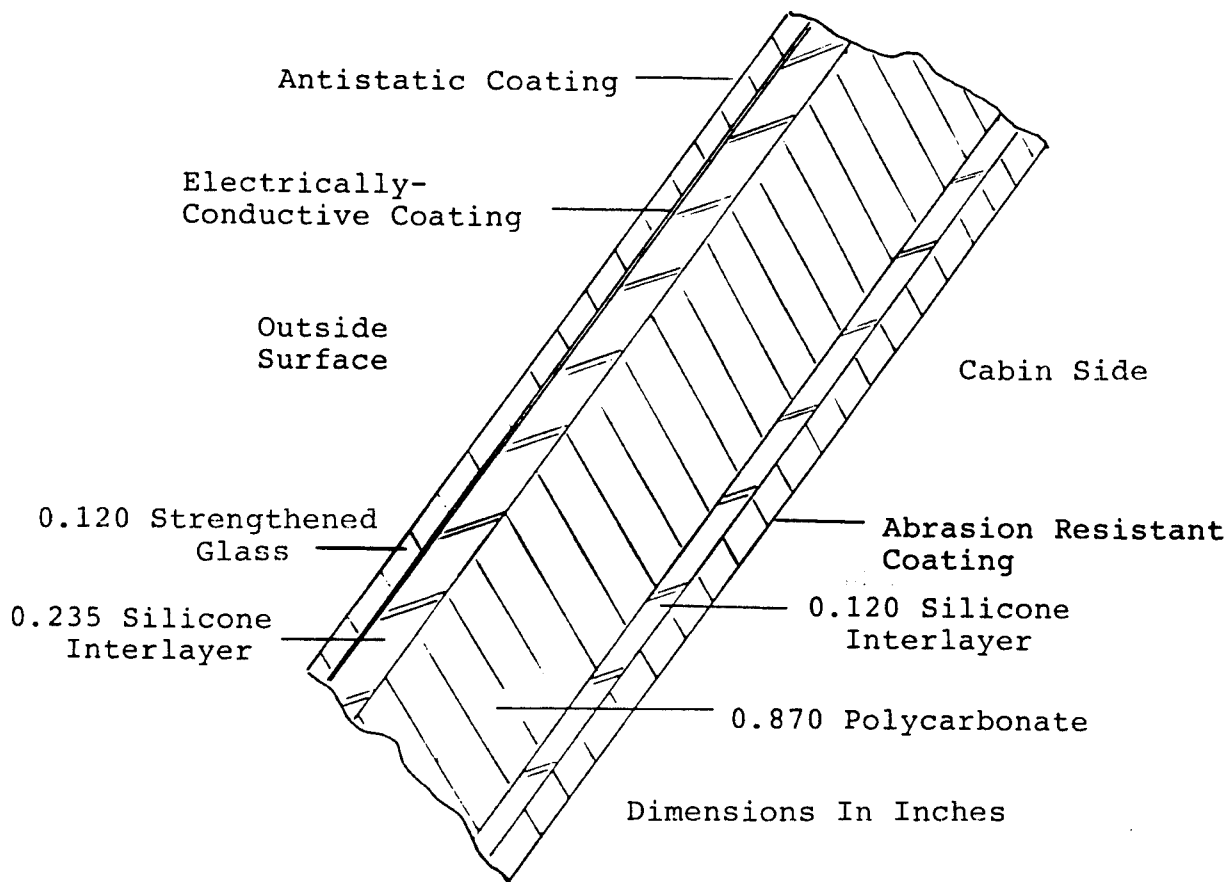


Figure 3. B-1B Windshield Cross Section (Ref. 2).

2.2 Nozzle Characteristics

The hot-air jet blast nozzles, illustrated in Figures 4 and 5, are located both internally and externally at the forward base of the windshield. Air is discharged at the base of the windshield panels and is directed upward and parallel along the windshield surface.

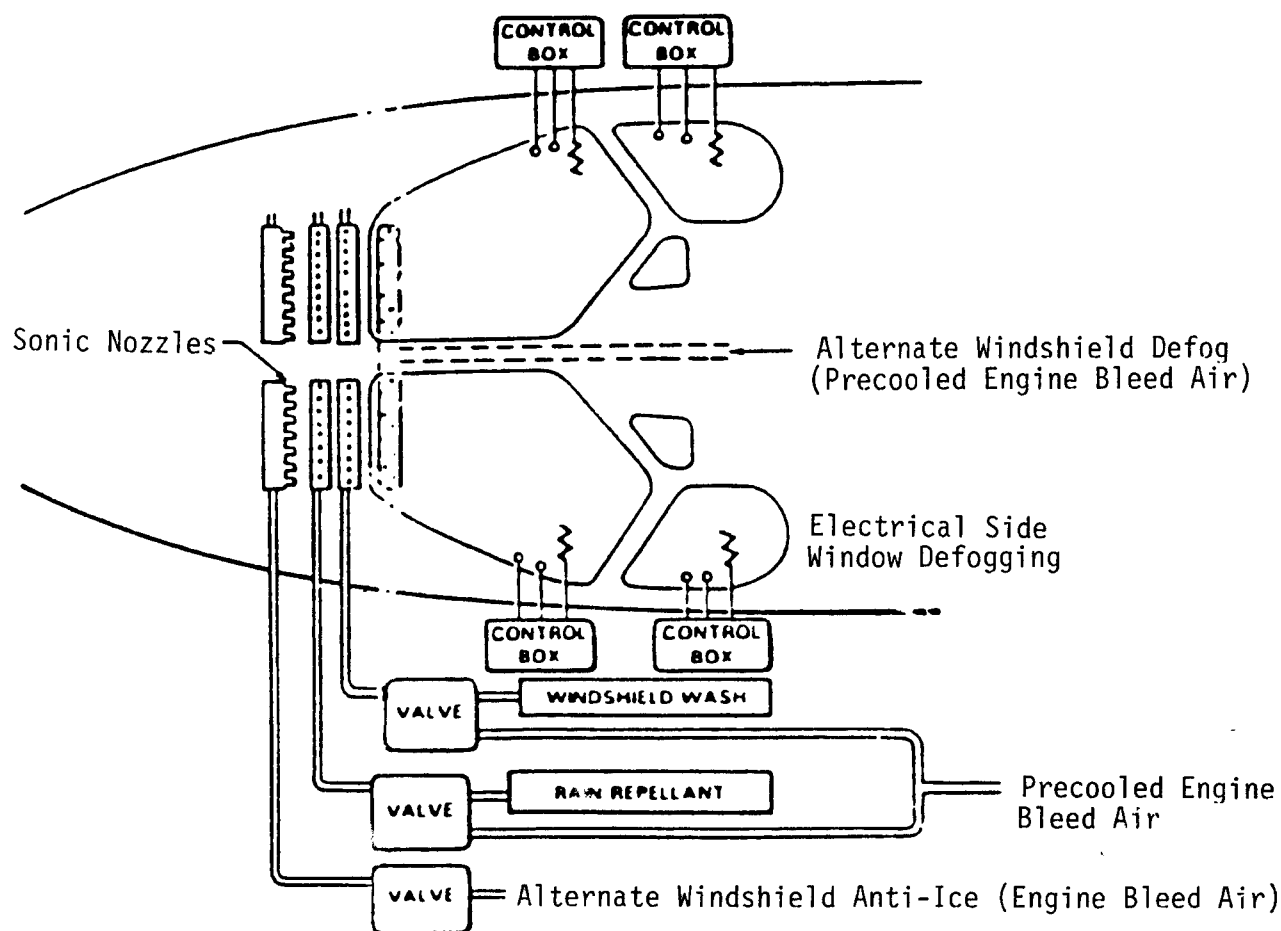


Figure 4. Windshield Nozzles; Top View (Ref.
(Ref. NA 86-1000, Vol. I)

The external nozzles are associated with the major anti-icing/de-icing functions of the windshield while the internal nozzles are responsible for defrost/defog functions. Each nozzle, one external and one internal for each of the two windshield panels, is fed by precooled engine compressor bleed air. Both internal and external nozzle exit air temperature is regulated to maximum values

of 170°F while on the ground, 300°F in flight, and a maximum pressure of 50 lb/sq.in. The external nozzle mass flow rates are maintained at 60 pounds/minute while interior nozzles are regulated to 5.5 pounds/minute (Ref. 4). The external nozzle exit openings measure 14 inches long by 0.125 inch wide giving each an exit area of 1.750 square inches. A listing of the external nozzle operating characteristics is given in Table 1.

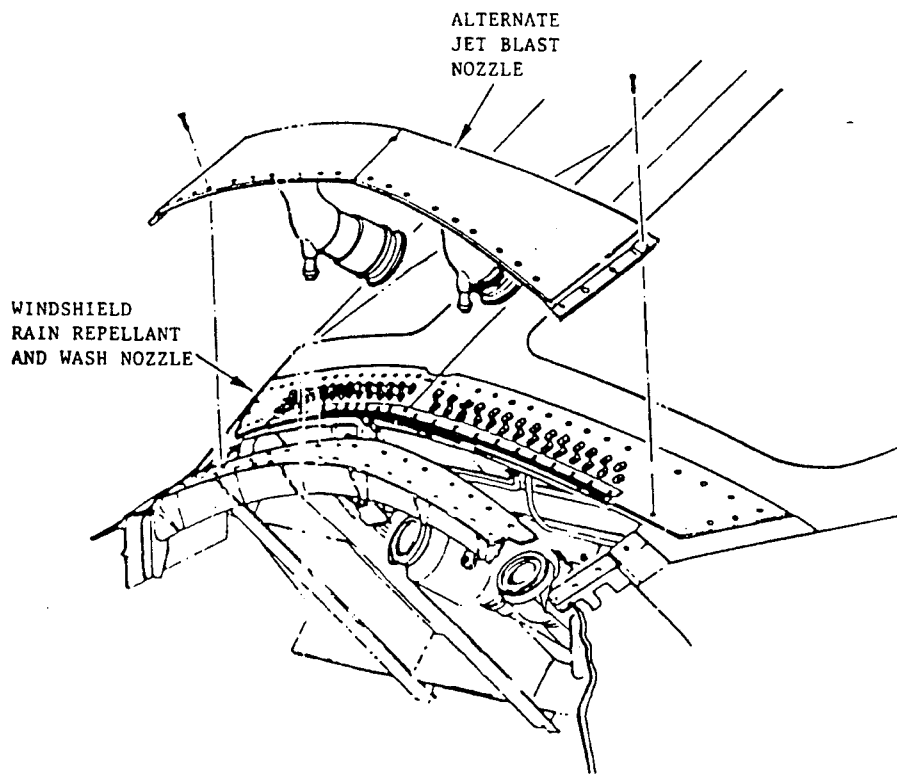


Figure 5. Anti-Ice Nozzle Geometry Detail
(Ref. NA 86-1000, Vol. I)

Table 1. External Nozzle Operating Characteristics

--- In Flight ---

Parameter	Known Value	Calculated Value
Mass flow rate, lb/min	60.0	-----
Total pressure, lb/sq. in	-----	34.0
Total temperature, deg. F	-----	505
Exit static pressure, lb/sq. in	14.7	-----
Exit static temperature, deg. F	300	-----
Exit velocity, ft/sec	-----	1570
Exit Mach number	-----	1.16
Exit area, sq. inches	1.750	-----

--- On the ground ---

Parameter	Known Value	Calculated Value
Mass flow rate, lb/min	60.0	-----
Total pressure, lb/sq. in	-----	30.0
Total temperature, deg. F	-----	312
Exit static pressure, lb/sq. in	14.7	-----
Exit static temperature, deg. F	170	-----
Exit velocity, ft/sec	-----	1300
Exit Mach number	-----	1.06
Exit area, sq. inches	1.750	-----

SECTION 3

ICING CRITERIA AND LIMITATIONS

The selection of icing parameters were based on scenarios representative of loiter, landing and ground/taxi modes of aircraft operation. For each operational mode, selection of the specific icing criteria and atmospheric conditions under which the aircraft was most likely to encounter icing, were based on a mix of known "most probable" and "worst case" variables documented by NASA, the FAA and the Air Force (Refs. 5,6,7).

In general, the aircraft windshield's susceptibility to icing is a function of many variables, which includes not only altitude and ambient temperature and pressure, but also aircraft airspeed, windshield orientation, panel geometry, water droplet diameter, liquid water content, cloud formation and relative humidity. For an aircraft utilizing hot-air jet blast anti-icing, the list of variables includes compressor bleed air temperature and bleed air mass flow rate.

Limitations on some of these parameters are discussed in References 5 and 6. Figure 6 illustrates the "most probable" icing conditions as a function of ambient temperature and altitude. Figure 7 is representative of the envelope of maximum continuous icing between 0 and 22,000 feet. The lower border of the envelope represents the "worst case" lowest ambient temperature and, therefore, the highest heating requirements, where icing might be encountered. The influence of the effects of airspeed, aerodynamic heating and altitude on the boundaries are shown in Figure 8. It is interesting to note that at altitudes above approximately 22,000 feet very little ice accretion occurs due to the decreasing liquid water content of the air with decreasing air temperature.

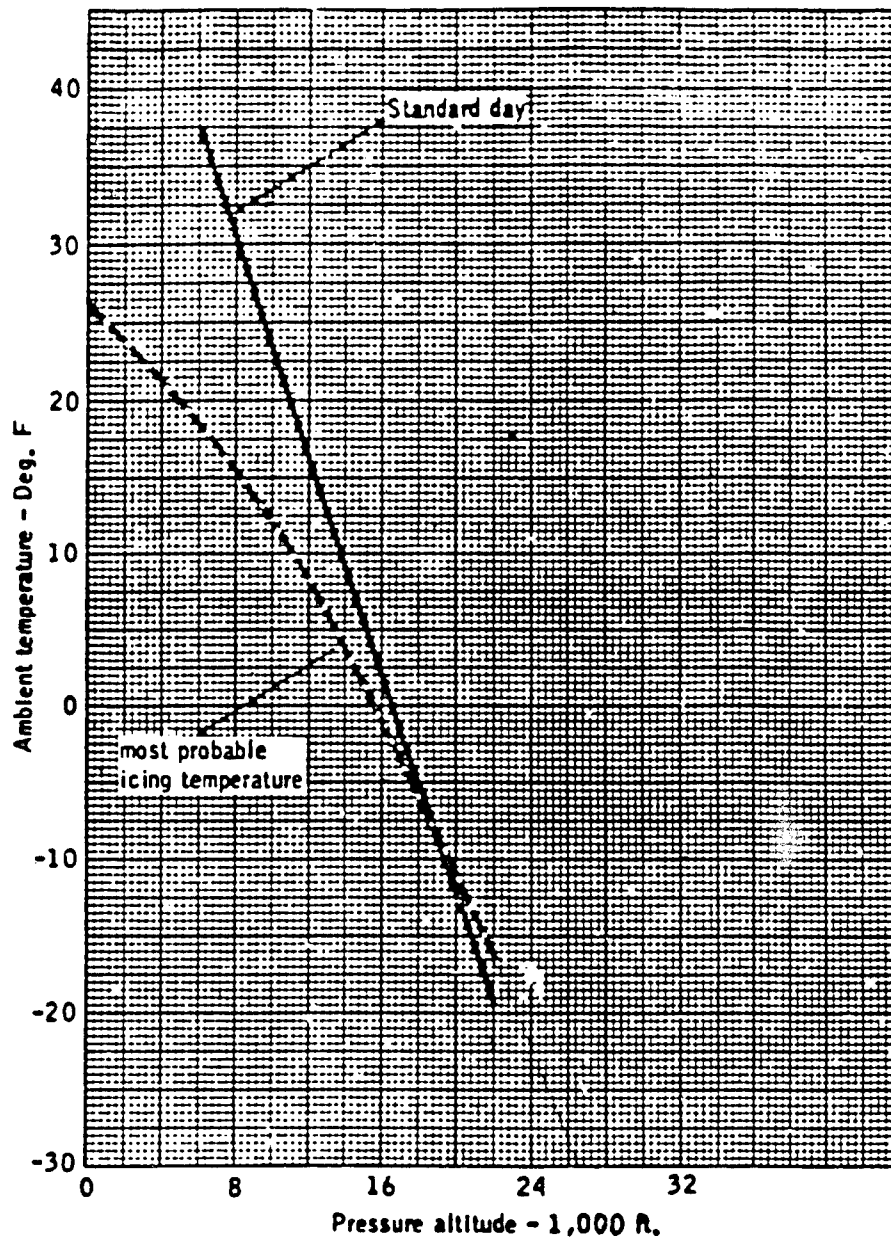


Figure 6. Most Probable Icing Temperature vs. Altitude (Ref. 5)

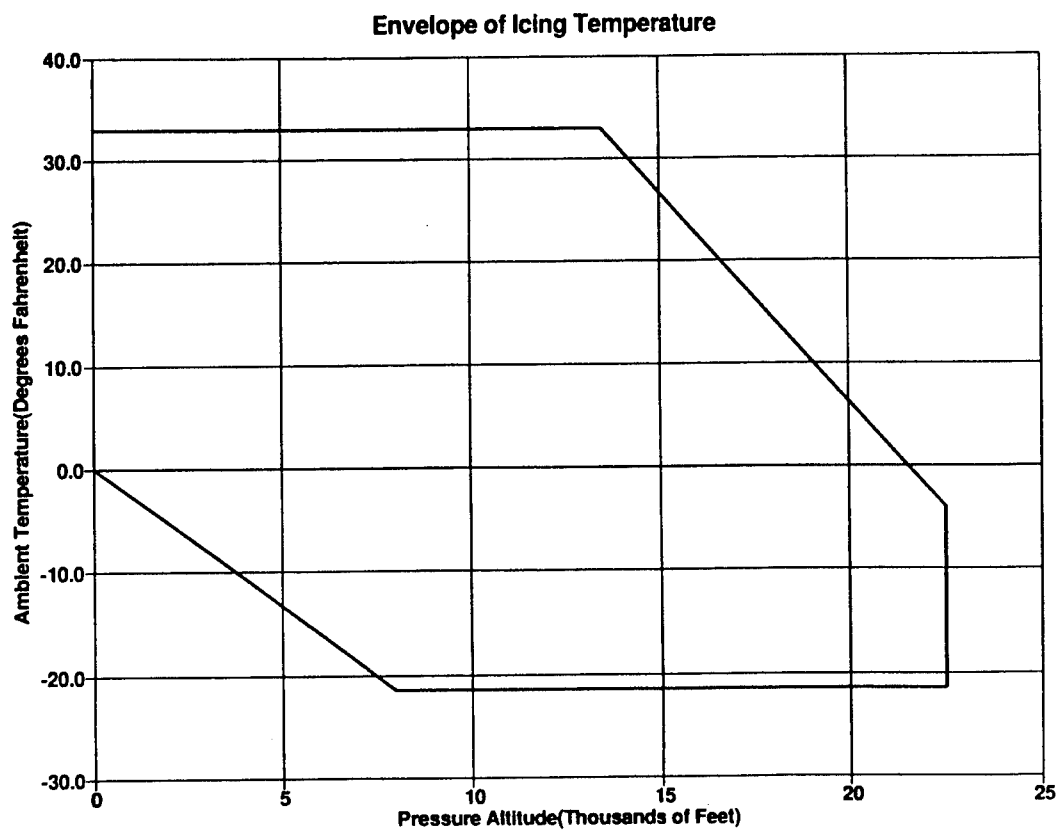


Figure 7. Maximum Continuous Icing Envelope (Ref. 2)

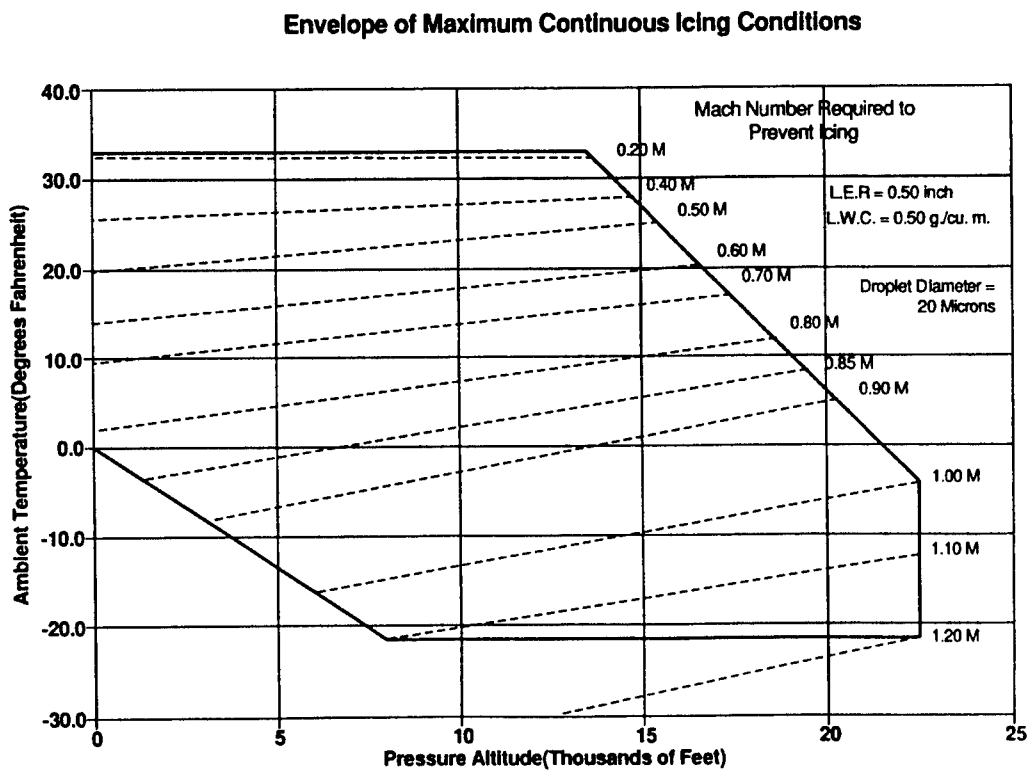


Figure 8. Mach Number Required to Prevent Icing (Ref. 2)

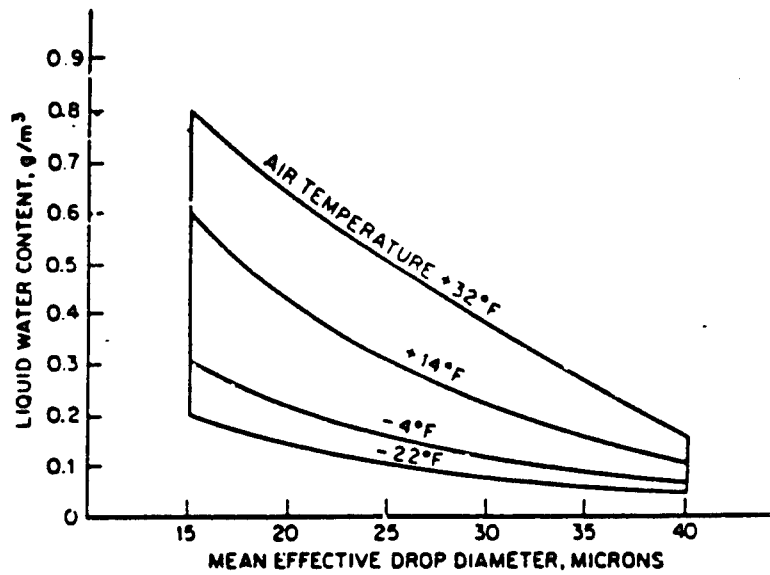


Figure 9. Liquid Water Content vs. Droplet Diameter (Ref. 2)

The relationship between liquid water content, droplet size and ambient temperature is shown in Figure 9. The icing parameters selected for use in the present analysis are listed in Tables 2 and 3. Note that the Case 1 parameters correspond to "most probable" icing conditions and Case 2 parameters correspond to a "worst case" highest heating requirement.

Table 2. Icing Parameters: Lower

Parameter	Case 1	Case 2
Pressure altitude, ft.	4000	8000
Ambient pressure, lb/sq.ft	1828	1572
Ambient temperature, deg. F	22.0	-22.0
Airspeed, ft/sec	470	350
Mach number	0.44	0.34
Median droplet diameter, microns	20	15
Liquid water content, gm/cu. m	0.5	0.2

Table 3. Icing Parameters: Landing

Parameter	Case 1	Case 2
Pressure altitude, ft.	S.L.	S.L.
Ambient pressure, lb/sq.ft	2116	2116
Ambient temperature, deg. F	26.0	0
Airspeed, ft/sec	250	200
Mach number	0.23	0.19
Median droplet diameter, microns	20	20
Liquid water content, gm/cu. m	0.5	0.3

Table 4. Icing Parameters: Ground/Taxi

Parameter	Case 1	Case 2
Pressure altitude, ft.	S.L.	S.L.
Ambient pressure, lb/sq.ft	2116	2116
Ambient temperature, deg. F	26.0	0
Airspeed, ft/sec	25	25
Mach number	0	0
Median droplet diameter, microns	20	20
Liquid water content, gm/cu. m	0.5	0.3

SECTION 4

ANALYSIS

The objective of the present study was to provide a theoretical model suitable for predicting the temperature distribution along the surface of the windshield from the hot-air nozzle exit plane to the pilot's eye location. Following Ross (Ref. 9), the model is adaptable to either dry or icing conditions and requires only limited parametric information regarding the aircraft flight profile, atmospheric conditions and compressor bleed data. The model is empirical, its formulation being based on experimental flight test and thermocouple data taken throughout a range of icing conditions. The expression for the model is

$$\frac{T_w}{T_a} = 1 + [K_1 + K_2 \log_{10}(W_b V / X^2 P_a)] \times \left(\frac{T_b}{T_a} - 1 \right) \quad (1)$$

where T_w is the windshield surface temperature in degrees R, T_a is ambient temperature in degrees R, W_b is bleed air mass flow rate in lb/sec, V is aircraft airspeed in ft/sec, X is distance along the windshield from the nozzle exit plane in feet, P_a is ambient pressure in lb/sq. ft., and T_b is bleed air temperature in degrees R.

The constants, K_1 and K_2 , are experimentally determined. Their general form is given by

$$K_1 = K_{1_0} + K_{1_D} + K_{1_L} \quad (2)$$

and

$$K_2 = K_{2_0} + K_{2_D} + K_{2_L} \quad (3)$$

where the "0" term is the dry air term, the "D" term accounts for median droplet diameter and the "L" term accounts for the liquid water content. For dry air conditions, the "D" and "L" terms are numerically zero. The variations of K_1 and K_2 values with droplet size and liquid water content are shown in Figures 10 and 11.

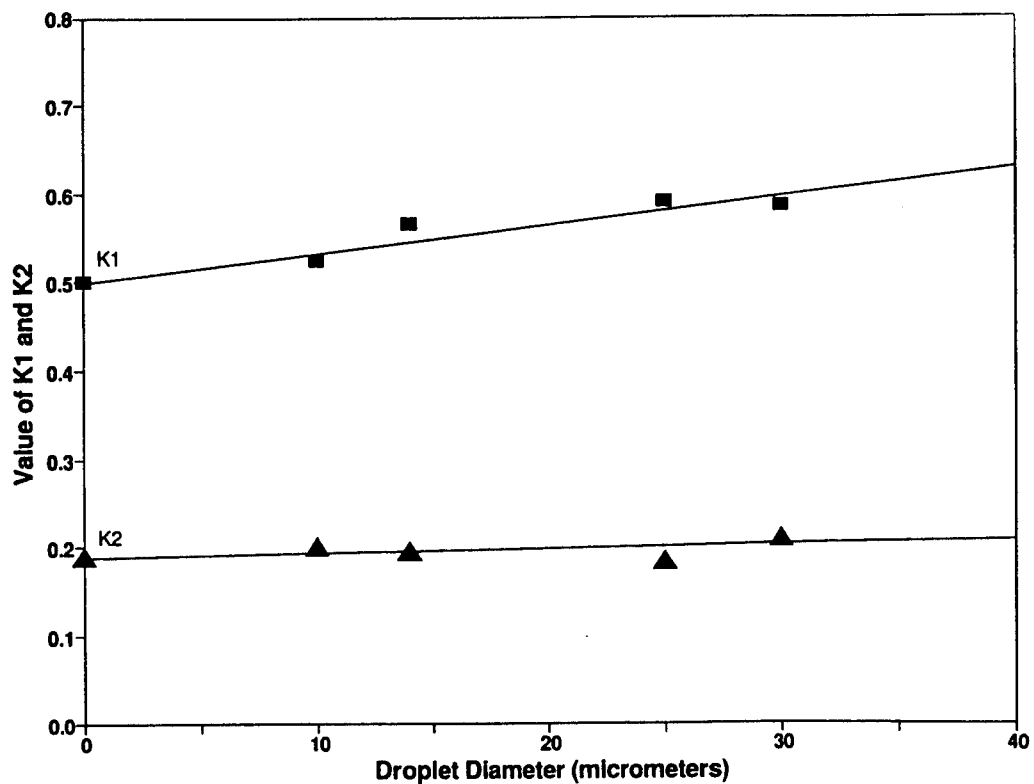


Figure 10. Variations of K_1 and K_2 with Droplet Diameter (Ref. 9)

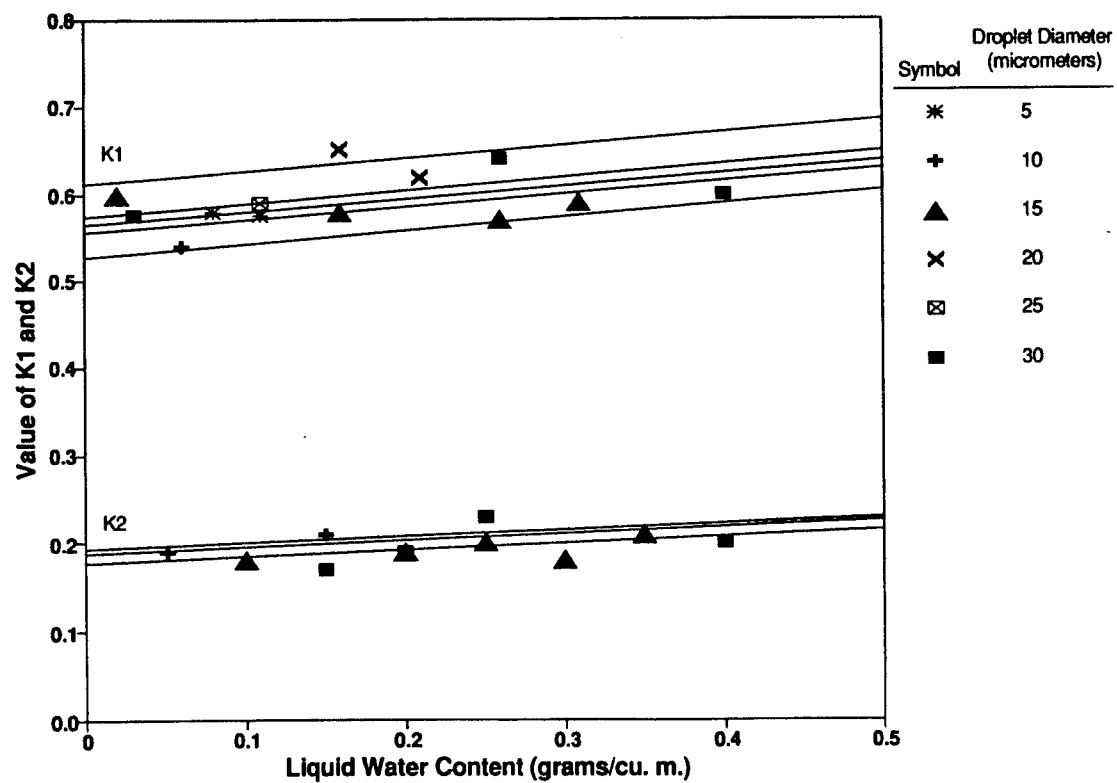


Figure 11. Variations of K_1 and K_2 with Liquid Water Content (Ref. 9)

Following Ross's linear regression analysis of his original flight test data (Ref.(9), the values of the constants were determined to be given by the following expressions

$$K_1=0.5131+0.003135(D)+0.06808(LWC) \quad (4)$$

and

$$K_2=0.1902+0.003793(D)+0.003974(LWC) \quad (5)$$

SECTION 5

RESULTS AND DISCUSSION

The calculated windshield temperature distributions, based on the input data listed in Tables 1, 2, and 3, are shown in Figures 12 and 13. The distributions apply to both the glass and plastic surfaced windshields. Also shown on the plots are the locations (relative to the nozzle) of the windshield forward edge, the intercept of the pilot's horizontal line of sight and the windshield (design eye intercept, 4.18 ft from nozzle - Figure 2), and the 35°F cutoff line. For the purposes of this evaluation, the analysis considers the windshield to be ice free as long as the surface temperature is predicted to remain above 35°F, the limiting value suggested in Reference 10. At 35°F or above, ice would not form and any existing ice accumulation would melt. Therefore, a clear windshield would be indicated in Figures 12 and 13 by a plotted curve lying completely above the 35°F line in the region between the windshield forward edge and the pilot's design eye intercept.

In all cases, the nozzle air temperature is predicted to rapidly decrease within a very short distance downstream of the nozzle exit. This decrease is attributable to the extreme effects of mixing and diffusion of the heated nozzle air with the free stream flow field.

For the loiter and landing modes of operation, the performance of the hot-air jet blast anti-icing system is indicated to be from marginal to adequate. The windshield is cleared (out to 5.69 ft) or nearly cleared (out to 4.1 ft) for the Loiter: Case 1 and Landing: Case 1 conditions, respectively. The reduced aircraft airspeed and ambient temperature for Loiter: Case 2 and Landing: Case 2 reduced the cleared length to 2.98 ft and 2.43 ft, respectively. The analysis tends to be conservative (i.e., the cleared area is generally larger than computed),⁹ and is somewhat approximate for aircraft other than the business jet from which the values of the constants K_1 and K_2 in Equations (4) and (5) were derived. Therefore the results presented in Figures 12 and 13 represent conservative first approximations to the actual performance of the B-1B blown air deice system.

Application of Equation 1 to the ground/taxi cases resulted in unrealistically low windshield surface temperatures and, therefore, only small, localized, deiced zones near the bleed air nozzle. Discussion with R. Ross ascertained that the equation had not been validated

ground/taxi conditions, having been developed based solely on flight test data. Results for the ground/taxi cases therefore are not presented in this report.

Analysis of B-1B Windshield Deice Using Engine Bleed Air

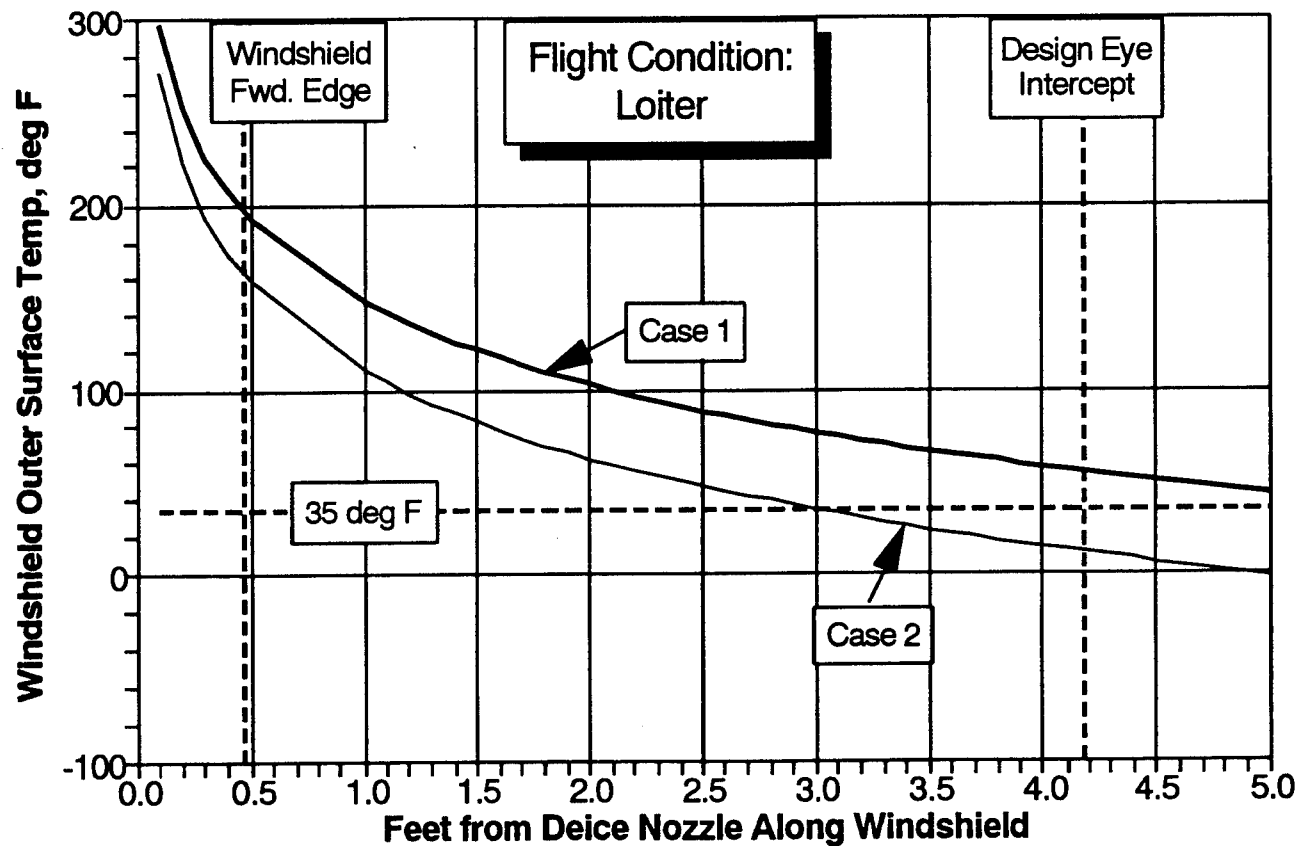


Figure 12. Windshield Outer Surface Temperature, Distribution: Loiter.

Analysis of B-1B Windshield Deice Using Engine Bleed Air

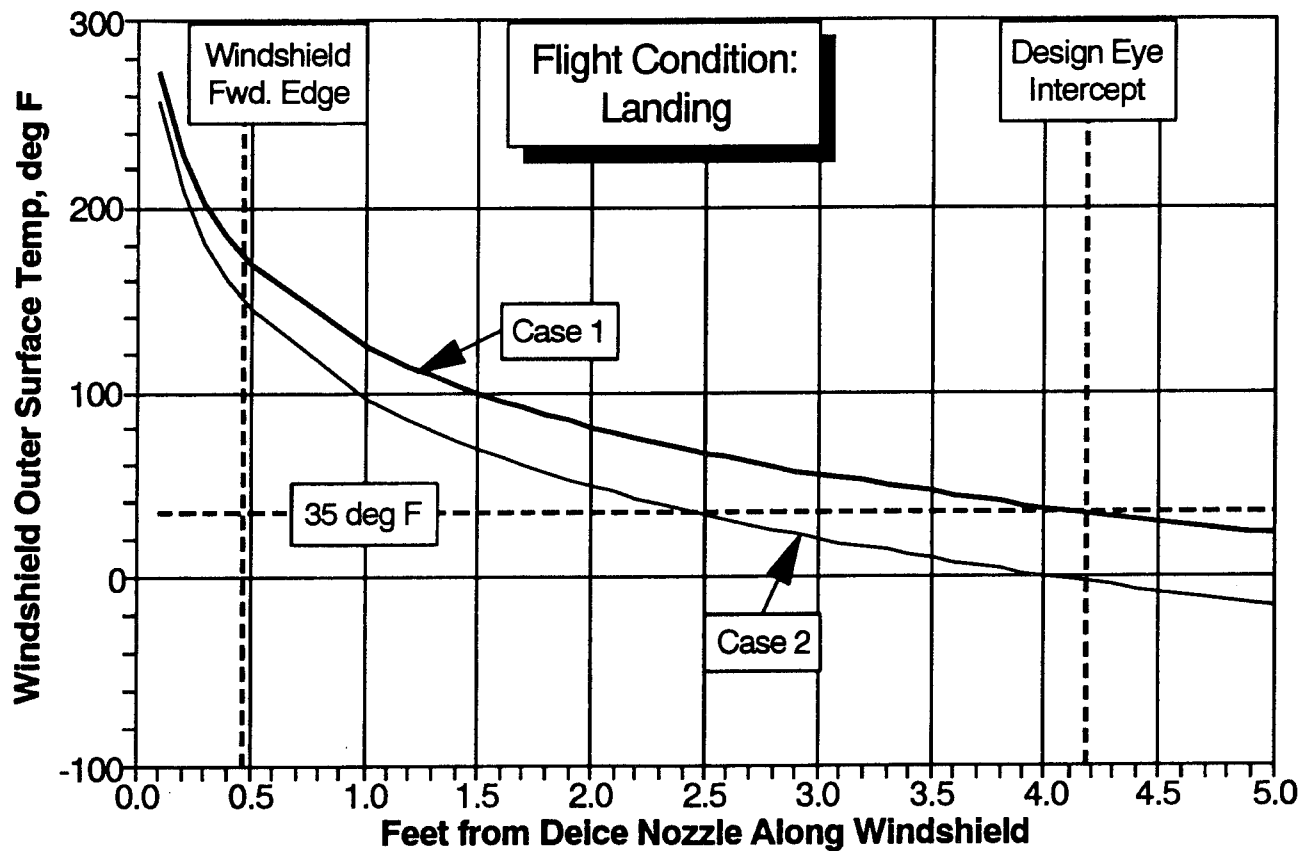


Figure 13. Windshield Outer Surface Temperature, Distribution: Landing.

SECTION 6

SUMMARY AND RECOMMENDATIONS

An analysis was conducted to determine the effectiveness of the B-1B windshield de-icing/anti-icing, external, blown-air system. The analysis assumed the blown-air system to be operating alone, without supplemental heat provided by the embedded electrical resistance system. The results of the analysis indicated that for the loiter and landing modes, the system performance ranges from marginal to adequate. It was determined that the empirically-derived equation used for analysis had not been validated for ground/taxi conditions, therefore, no results or conclusions for ground/taxi operation are presented.

It is recommended that a ground/taxi icing test be conducted to evaluate the effectiveness of the deice system to ground/taxi conditions similar to those suggested. This test could be accomplished either in an adequately equipped icing wind tunnel or on an operational aircraft under ground icing conditions. Sufficient thermocouple data should be obtained to provide input to the Ross model to extrapolate/expand its applicability into the ground/taxi regime. Similar testing should also be conducted for flight conditions in order to verify the results reported in Section 5.

REFERENCES

1. Aircraft Icing Handbook, Vol.3, Chapter V, Section 9, DOT/FAA/CT-88/8-3, March 1991.
2. Bockstahler, A.J., Meis, C.S., "Volume II - Environmental Protection System - A/C-1 and A/C-9," NA-86-1000, Vol. II, 14 January 1986.
3. CP2569A01A "Prime Item Development Specification (U) for B-1B Strategic Aircraft (U)," 23 November 1981.
4. Aircraft Icing Handbook, Vol.2, Chapter III, Section 5, DOT/FAA/CT-88/8-2, March 1991.
5. Hacker, P.T. and Dorsch, R.G., "A Summary of Meteorological Conditions Associated with Aircraft Icing and a Proposed Method of Selecting Design Criteria for Ice Protection Equipment," NACA TN 2569, 1951.
6. Aircraft Icing Handbook, Vol. 3, Chapter VI, Section 1, DOT/FAA/CT-88/8-3, March 1991.
7. Lewis, W., Kline, D.B., and Steinmetz, C.P., "A Further Investigation of the Meteorological Conditions Conducive to Aircraft Icing," NACA TN 1424, 1947.
8. Air Worthiness Standards: Transport Category Airplanes, Federal Aviation Regulations, FAR Part 25, U.S. Department of Transportation, FAA, Washington D.C., 1986.
9. Ross, R., "Analysis of an Airplane Windshield Anti-Icing System Using Hot-Air," Journal of Aircraft, Vol. 20, No. 11, November 1983.
10. "Transparent Areas on Aircraft Surfaces (Windshields and Canopies), Rain Removing and Washing Systems for Defrosting, De-Icing, Defogging; General Specifications for, MIL-T-5842B," 29 March 1985.